



PROJECT: _____
 ITEM #: _____
 QUANTITY #: _____
 DATE #: _____

CHARBROILERS

ITEM NUMBERS

MT-CB12-M MT-CB24-M
 MT-CB36-M MT-CB48-M

SPECIAL FEATURES



- The Manotick Radiant Broilers are available in 12”, 24”, 36”, & 48” widths
- Adjustable manual gas controls provide easy and safe operations
- Pilot light can be lit from the front for ease of use
- “U” shape burners provide even heat distribution every 12”
- Adjustable pilot light lit from front of unit 35,000 BTU / burner
- 10 Ga. Cast Iron Radiants
- Gas control knob every 12”
- All stainless steel cabinet
- Double wall insulated sides
- “Cool-to-the-touch” front s/s edge
- Back and side splash guards
- Flue located on back of unit for ample ventilation
- Adjustable stainless steel legs, non-skid feet
- Easy to remove full width crumb tray



SANITATION


PROJECT: _____

ITEM #: _____

QUANTITY #: _____

DATE #: _____

CHARBROILERS - Products Specifications

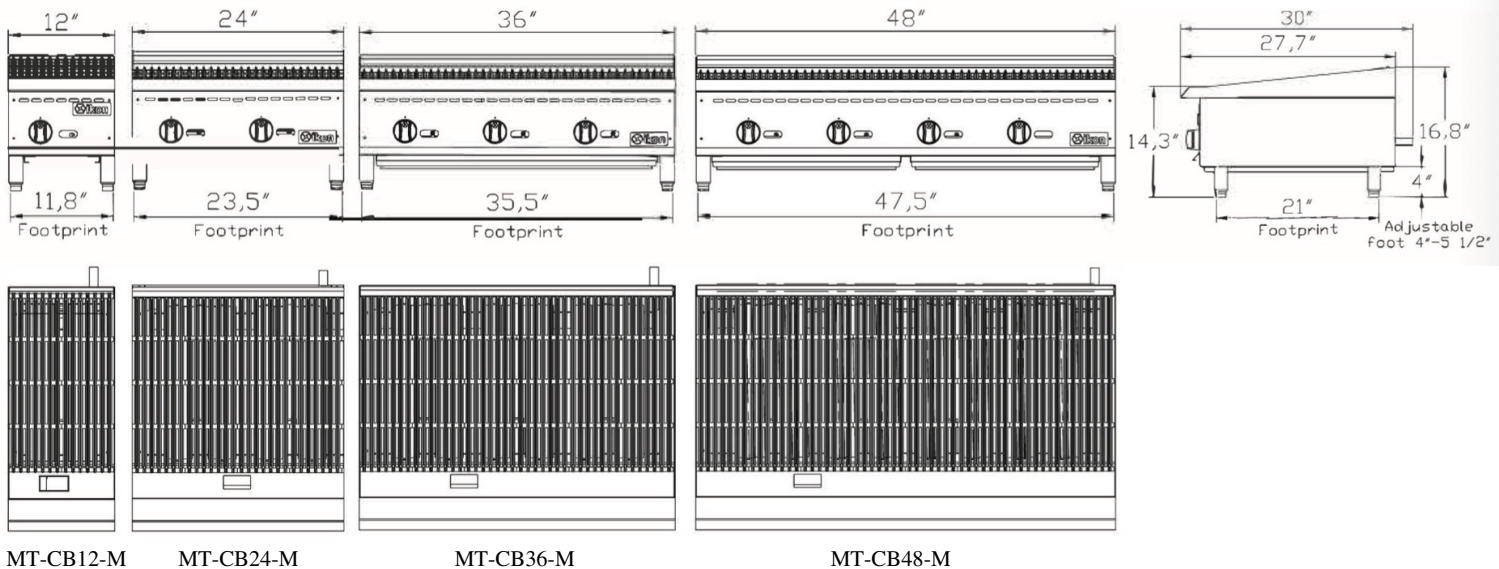

Model	Footprint	Overall Dimensions	Weight	Shipping Dimensions	Shipping Weight
MT-CB12-M	11.8"W x 21"D (30cm x 54cm)	12.0"W x 34.4"D x 15.2"H (30.5cm x 87.4cm x 38.6cm)	69.3 lbs	16.1"W x 36.2"D x 19.3"H (41cm x 92cm x 49cm)	101 lbs (46 kg)
MT-CB24-M	23.5"W x 21"D (60cm x 54cm)	24.0"W x 34.4"D x 15.2"H (61.0cm x 87.4cm x 38.6cm)	138 lbs	28.3"W x 36.2"D x 19.3"H (72cm x 92cm x 49cm)	170 lbs (77.3 kg)
MT-CB36-M	35.5"W x 21"D (90cm x 54cm)	36"W x 34.4"D x 15.2"H (91.4cm x 87.4cm x 38.6cm)	185 lbs	40.6"W x 36.2"D x 19.3"H (103cm x 92cm x 49cm)	229 lbs (104 kg)
MT-CB48-M	47.5"W x 21"D (120cm x 54cm)	48"W x 34.4"D x 15.2"H (122cm x 87.4cm x 38.6cm)	237 lbs	52.8"W x 36.2"D x 19.3"H (134cm x 92cm x 49cm)	288 lbs (130.1 kg)

Model	Cooking Area	Controls	# of Burners	BTU's per Burner	Total BTU's
MT-CB12-M	12"W x 20.0"D	Manual	1	35,000	35,000
MT-CB24-M	24"W x 20.0"D	Manual	2	35,000	70,000
MT-CB36-M	36"W x 20.0"D	Manual	3	35,000	105,000
MT-CB48-M	48"W x 20.0"D	Manual	4	35,000	140,000

Please Note: These items are shipped on a pallet and are crated for protection during LTL shipment. Overall Dimensions include the gas regulator located on the back of the unit

GAS REQUIREMENTS:

- Natural Gas Gas main supply required
- 3/4" NPT gas connection
- Natural gas 4" W.C. One pilot light per burner
- MT-COG Includes leg and caster kit, MT-COG2 Includes stacking kit
- A conversion kit is supplied with each unit. In order to avoid any warranty issues, conversion of your unit must be completed by an authorized Manotick service agent.

