



PROJECT: _____

ITEM #: _____

QUANTITY #: _____

DATE #: _____



RANGES

ITEM NUMBERS

MT-R24 MT-R36


SPECIAL FEATURES

- 30,000 BTU top burner (each), 33,000 BTU Oven
- 2" 4-burner, 1 static oven
- 36" 6-burner, 1 static oven
- Standing pilot light for individual burners
- 12" x 12" Cast iron grates
- Oven thermostat adjusts from 200°F - 500°F
- Manual gas controls
- Oven with 2-racks, 3 positions
- Stainless steel front, back riser, & lift off shelf
- Easy to remove full width crumb tray
- Oven interior door, sides, hearth are porcelain coated
- Flue located on back of unit for ample ventilation




SANITATION


RANGES - Products Specifications

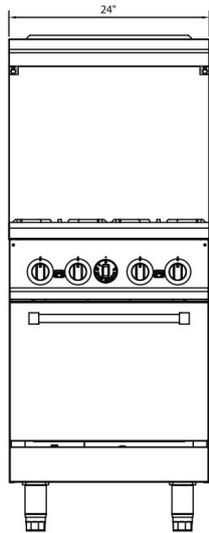

4 Burner Range front view

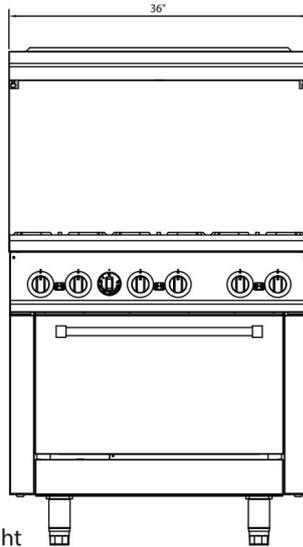


6 Burner Range front view

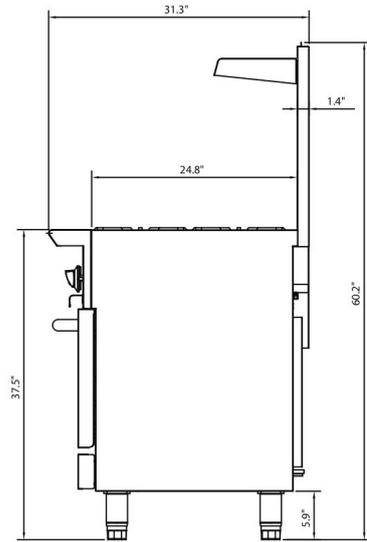


side view

Legs adjustable from 6" to 8" total height

Oven inside dimensions are 26-1/2" wide x 18" high by 22-1/2" deep.

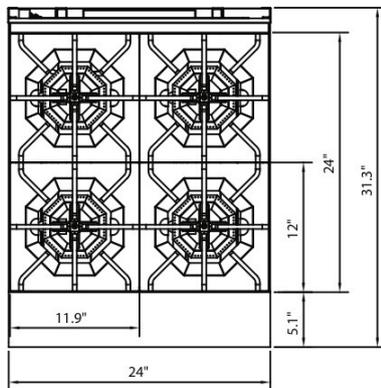

4 Burner Range top view

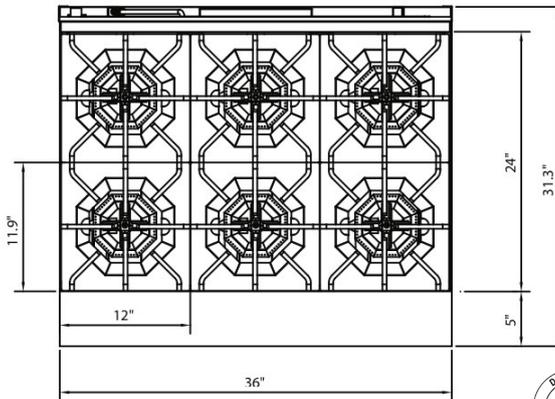

6 Burner Range top view



Model	Description	Total BTU	KW	Overall Dimensions	Weight	Shipping Dimensions	Ship Weight
MT-R24	(4) Burners	153,000	45	23.9"W x 31.4"D x 60.2"H (60.9cm x 79.7cm x 153.0cm)	277 lbs (126 kg)	28.0"W x 37.0"D x 45"H (71cm x 94cm x 112cm)	366 lbs (166 kg)
MT-R36	(6) Burners	213,000	63	35.9"W x 31.4"D x 60.2"H (91.2cm x 79.8cm x 153.0cm)	361 lbs (164 kg)	39.8"W x 37.0"D x 45"H (101cm x 94cm x 112cm)	471 lbs (214 kg)

GAS REQUIREMENTS:

- Natural Gas Gas main supply required
- 3/4" NPT gas connection
- Natural gas 5" W.C.
- A conversion kit is supplied with each unit. In order to avoid any warranty issues, conversion of your unit must be completed by an authorized Manotick service agent.

Please Note: These items are shipped on a pallet and are crated for protection during LTL shipment. Overall Dimensions include the gas regulator located on the back of the unit